

Seating » Seats



Collection: Avenue

Designed by: Botton + Gardiner

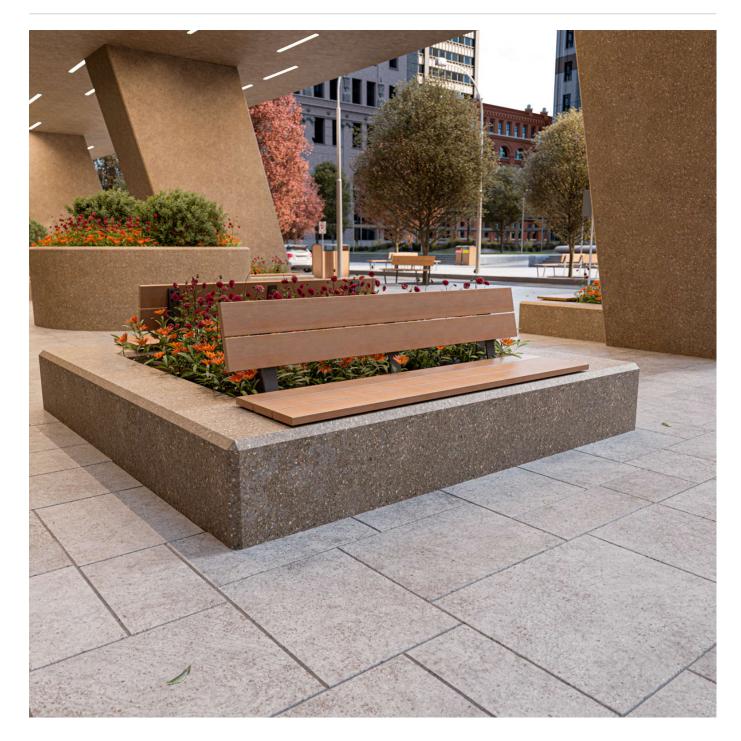



PUBLIC SPACE FURNITURE


Seating » Seats

Hardwood Blackbutt UV-Resistant Oil	Hardwood Spotted Gum UV-Resistant Oil	Hardwood Merbau UV-Resistant Oil	Hardwood Mixed Red UV-Resistant Oil Clear	Hardwood Mixed Red UV-Resistant Oil Mahogany
Hardwood Mixed Red UV-Resistant Oil Ebony	Galvanised Steel	Core Powder-Coat White Satin	Core Powder-Coat Black Satin	Core Powder-Coat Charcoal Satin
Core Powder-Coat Palladium Silver Satin	Core Powder-Coat Matt Black Matt	Core Powder-Coat Pearl White Gloss	Solid Powder-Coat Coffee Satin	Solid Powder-Coat Cove Satin
Solid Powder-Coat Monument Matt	Solid Powder-Coat Medium Bronze Kinetic Flat	Textured Powder- Coat Core Ten Textured Metallic	Textured Powder- Coat Asteroid Textured Metallic	Textured Powder- Coat Bass Textured Metallic
Textured Powder- Coat Textura Black	Textured Powder- Coat Textura	Textured Powder- Coat Textura White	Signature Powder- Coat Deep Ocean	Signature Powder- Coat Wedgewood


botton + gardiner

Seating » Seats





Seating » Seats

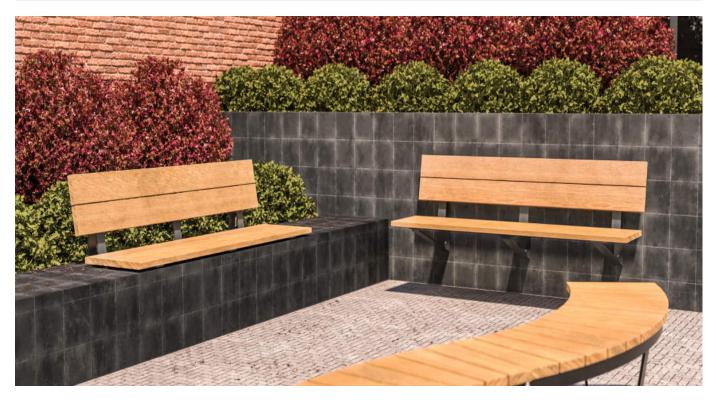

Modern, wall-mounted, plinth seat. Hardwood battens in 5 colours with a triangular steel frame in 27 powder-coat colours or a galvanised finish.


Description	Rectangular battens and a triangular steel frame combine to deliver a modern wall-mounted plinth seat design that takes its cues from 20th century industrial design. The functional feel and light appearance of the Avenue plinth seat complements and sits within most public spaces. Finishes include 5 hardwood batten colours and 27 powder-coat finishes or a galvanised finish.	
Made In	Australia	
Dimensions	Hardwood 1800mmW x 580mmD 2100mmW x 580mmD 30mm thick hardwood Recommended installed seat height: 450mm	
Batten Type	Hardwood Blackbutt, Spotted Gum, Mixed Red - Clear, Mahogany, Ebony Oil	



Seating » Seats

Гката	Powder-coated steel or hot-dip galvanised steel.	
Frame	Optional 316 stainless steel in matt textured frame finish available on request.	
Powder Coat	Core White (satin), Black (satin), Charcoal (satin), Palladium Silver (satin), Matt Black (matt), Pearl White (gloss)	
	Solid Coffee (satin), Cove (satin), Monument (matt), Medium Bronze Kinetic (flat)	
	Textured Core Ten (textured metallic), Asteroid (textured metallic), Bass (textured metallic), Textura Black (textured), Textura Monument (textured), Textura White (textured)	
	Signature Deep Ocean (satin), Wedgewood (satin), Mangrove (satin), Territory Red (matt), Claypot (satin), Paperbark (satin)	
	Bold Bondi Blue (gloss), Leaf (satin), Sensation (gloss), Lobster (satin), Moonlight (satin)	
Sustainability	Certified Hardwood All hardwood is sourced from sustainable forests certified by the Program for the Endorsement of Forest Certification (PEFC), the world's largest forestry certification system.	
	Recycled Materials We locally source our steel. It means we know it uses recycled content and is 100% recyclable.	
	Low Pollutants Our powder-coating process doesn't emit Volatile Organic Compounds (VOCs) and has Environmental Product Declarations (EPDs).	
Warranty	5-year warranty. View the <u>warranty</u> for more details.	
Lead Time	6-8 weeks	
Assembly & Delivery	Shipped fully assembled on pallets.	
Fixing Detail	Fixed to existing plinth by others. Anchors not included.	

How to Specify Select your length Select your batten finish Select your frame finish Select your fixing type



### Care Instructions

#### Hardwood Cleaning

Remove any loose surface deposits with a soft bristled brush and wipe down with fresh water and a non-abrasive cloth.

### Oiling

Oiling of timber will postpone natural greying, repel moisture, improve mould resistance, help maintain a smooth surface texture and enhance the grain and colour.

To maintain, lightly sand rough areas of timber and brush on one coat of

To maintain, lightly sand rough areas of timber and brush on one coat of timber decking oil every 6 months or as required.
<u>Powder-Coat</u> Cleaning Carefully remove any loose surface deposits with a wet sponge or soft bristled brush.
Use a soft (non-abrasive) cloth or brush and a diluted solution of mild detergent and warm water.
Ensure surfaces are thoroughly rinsed with clean fresh water after cleaning to remove all residues.
Never use thinners, abrasive cleaning agents, alcohol-based, acid or alkali cleaning agents.
<u>Hot-Dip Galvanised Steel</u> For general cleaning of bulk contaminants such as dirt and the like, ordinary laundry soaps can be satisfactorily used.
For more stubborn or larger areas, the use of a low-pressure wash (eg. a gurney gun) with just pure water or in conjunction with proprietary cleaning materials, such as car wash or truck wash, can be effective. It is important that the steel be washed down with fresh water after cleaning.
The cleaning treatment of the galvanising should be conservative at first and then if the situation demands, the treatment can become steadily more aggressive. Also, wherever some form of mechanical abrasion or "scrubbing" is required, the use of a hard, plastic bristle brush is recommended. Steel bristle brushes are not to be used since they will cause discolouration.

Mechanical methods of cleaning zinc surfaces can cause aesthetic issues. The "cleaned" areas are likely to contrast with adjacent untreated surfaces and may take a significant period of time to weather to a uniform colour. If aesthetics is a large concern, it is advisable to first test the cleaning method in an inconspicuous area in case the aesthetic effect is unappealing.

### Customisable

As this item is made to order locally, custom lengths are available on request.

Seating » Seats

Additional<br/>CommentsHardwood is treated with a UV-resistant oil finish.As this item is made to order locally, custom lengths or armrests are<br/>available on request.

